



\ Hrd.#k k k "_ Ub[V]Xn'Vea



FEATURES

- Surface mount ceramic enclosures
- High reliability seam welded seal
- Ultra-light weight and ultra-miniature size
- Wide frequency range




Item		Specifications
Nominal Frequency Range	f_0	8.0MHz ~ 50.0MHz (Fundamental)
		40.0MHz ~ 80.0MHz (3.O.T)
Frequency Tolerance, $T_a=25^{\circ}\text{C} \pm 3^{\circ}\text{C}$	$\Delta f/f$	$\pm 0\text{ppm}$
Load Capacitance	C_L	1pF~
Frequency Tolerance over Operating Temperature Range	$\Delta f/f$	$\pm 20\text{ppm}$
Operating Temperature Range	T_{OPR}	$-10^{\circ}\text{C} \sim +70^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	$-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$
Drive Level	DL	0.1mW (0.5mW Max.)
Shunt Capacitance	C_0	7pF Max.
Insulation Resistance	IR	500M Ω Min.
Aging	Δf_A	$\pm 3\text{ppm/Year Max.}$


SERIES RESISTANCE (ESR)					
Frequency Range	$8 < f_0 \leq 16$	$16 < f_0 \leq 25$	$25 < f_0 \leq 30$	$30 < f_0 \leq 50$	$40 < f_0 \leq 80$ (3.O.T)
ESR	80 Ω Max.	50 Ω Max.	40 Ω Max.	35 Ω Max.	80~100 Ω Max.

Please consult our sales representatives for other specifications.

DIMENSION (mm)

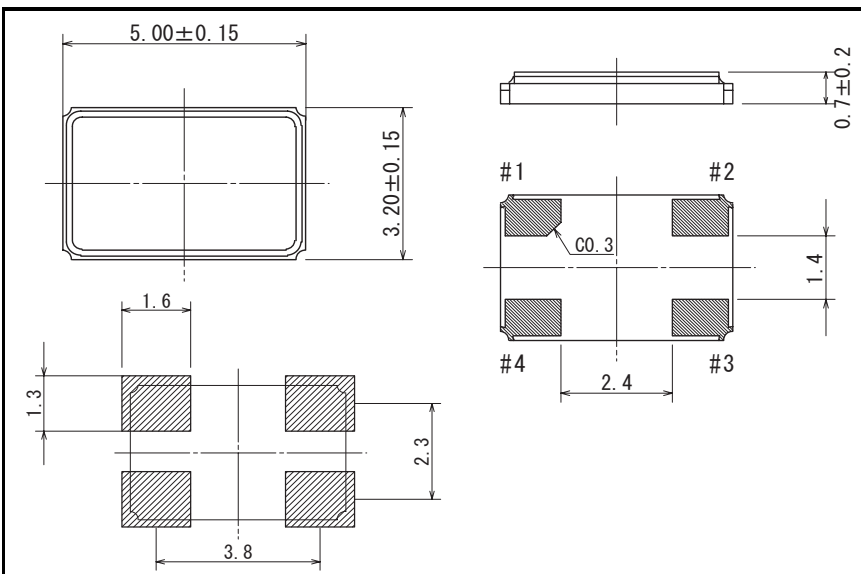

SOLDERING PATTERN (mm)

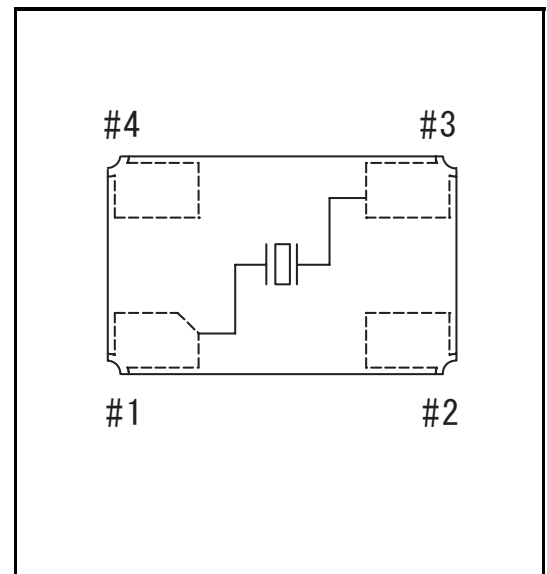

All specifications are subject to change without notice