



FEATURES

- Surface mount ceramic enclosures
- High reliability seam welded seal
- Ultra-light weight and ultra-miniature size
- Wide frequency range




Item		Specifications
Nominal Frequency Range	f_0	12.0MHz ~ 50.0MHz (Fundamental)
Frequency Tolerance, $T_a=25^{\circ}\text{C} \pm 3^{\circ}\text{C}$	$\Delta f/f$	$\pm 20\text{ppm}$
Load Capacitance	C_L	10pF
Frequency Tolerance over Operating Temperature Range	$\Delta f/f$	$\pm 20\text{ppm}$
Operating Temperature Range	T_{OPR}	$-10^{\circ}\text{C} \sim +70^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	$-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$
Drive Level	DL	0.1mW (0.5mW Max.)
Shunt Capacitance	C_0	7pF Max.
Insulation Resistance	IR	500M Ω Min.
Aging	Δf_A	$\pm 3\text{ppm/Year Max.}$

SERIES RESISTANCE (ESR)


Frequency Range	$12 < f_0 \leq 25$	$25 < f_0 \leq 50$
ESR	100 Ω Max	60 Ω Max

Please consult our sales representatives for other specifications.

DIMENSION (mm)

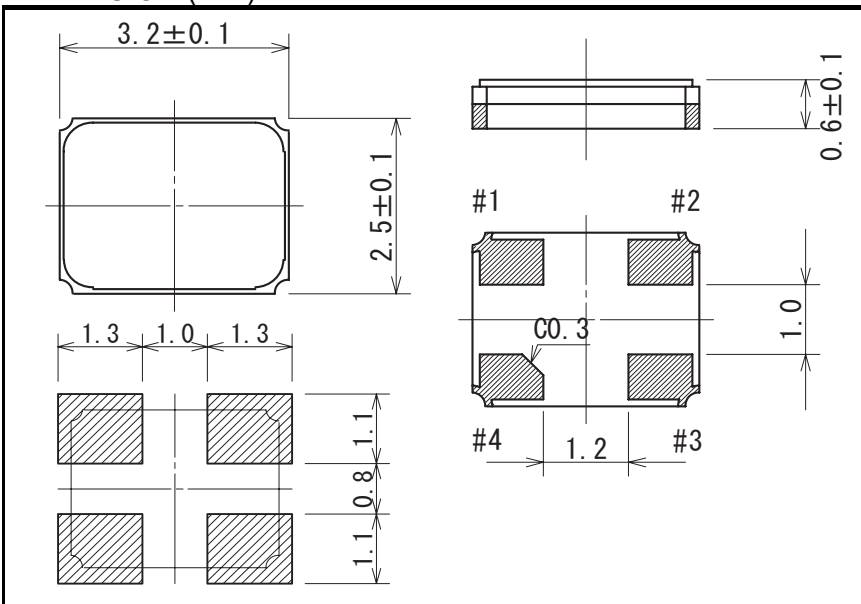

SOLDERING PATTERN (mm)

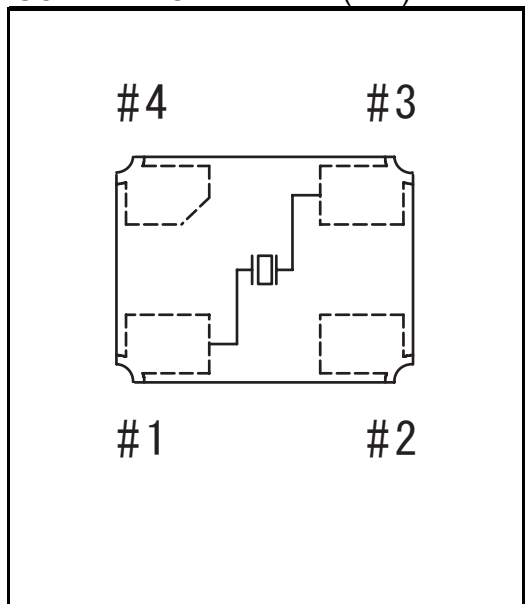

All specifications are subject to change without notice.